

time of inspection of steel plates.

- (d) Visual inspection, dimensional check and certificates correlation / verification for bought out items, such as heavy duty pipes, SORF flanges, etc. If required, samples may be taken by Inspecting Authorities for testing in the Third Party Laboratory.
- (e) In case of non-availability of indigenous steel plates, party has to take prior approval for procuring imported steel plates and at least 10% of these Steel Plates are to be tested for Ultrasonic Test by TPIA.

STAGE-2: GREY INSPECTION:

- (a) Visual check of U/G tank
- (b) Checking overall dimensions of the main tank as per specification/ IS code/ drawings/ tolerance given as applicable.
- (c) Checking the completeness of welding
- (d) Visual check / Dimensional check of all the fittings
- (e)


STAGE-3: FINAL INSPECTION:

Hydrostatic pressure testing at 0.50 kg/cm² pressure for one hour by hammering around all welded joints. Tank should not leak at any joint. Acceptance/Rejection will be as per BPCL approved drawing for dimensions. Check list and stage wise inspection report /release note to be given by TPIA.

QAP for UG tank

SR NO	INSEPECTION PARAMETERS	MODE / TYPE OF INSPECTION	Extent of Inspection	REFERENCE DOCUMENT / MATERIAL	ACCEPTABLE LIMIT / CRITERION / SPECIFIED VALUES	FINDINGS
1	Visual inspection of steel plates for defects, such as out of square, scabs and slivers (peeling away / pitting), corrosion, laminations, inclusions, etc.	Physical verification of steel plates for the inspection parameters	100%		Plates with scabs and slivers (peeling away / pitting), out of square, corrosion, laminations, inclusions, etc. is not acceptable	
2	Dimension check of steel plates. Especially thickness of the plates, it shall be clearly mentioned in the inspection report issued by TPIA.	Physical verification of steel plates for the inspection parameters	100%		As per BPCL specifications	
3	Properties (physical and chemical) as per IS 2062 at the Third Party Laboratory.	Witness the testing	At least, one sample each will be taken from the batch of 10 plates subject to minimum one sample from each heat no. / cast no.	Manufacturers Test Certificate should be available at the time of inspection of steel plates.	as per IS 2062 Gr B	
4	Inspection of bought out items, such as heavy duty pipes, SORF flanges, etc. If required, samples may be taken by Inspecting Authorities for testing in the Third Party Laboratory.	Visual inspection, dimensional check and certificates correlation / verification	100%	Material certificates	As per BPCL specifications	
5	Visual check of U/G tank	Physical verification	100%	BPCL specification	As per BPCL specifications	
6	Checking overall dimensions of the main tank as per specification/ IS code/ drawings/ tolerance given as applicable.	Physical verification	100%	BPCL specification	As per BPCL specifications	
7	Checking the completeness of welding	Physical verification	100%	BPCL specification	As per BPCL specifications	
8	Visual check / Dimensional check of all the fittings	Physical verification	100%	BPCL specification	As per BPCL specifications	
9	Hydrostatic pressure testing at 0.50 kg/cm ² pressure for one hour by hammering around all welded joints. Tank should not leak at any joint. Check list and stage wise inspection report /release note to be given by TPIA.	Physical verification	100%	BPCL specification	As per BPCL specifications	

Drawing of 10 KL, 15 KL, 20 KL and 45 KL enclosed.

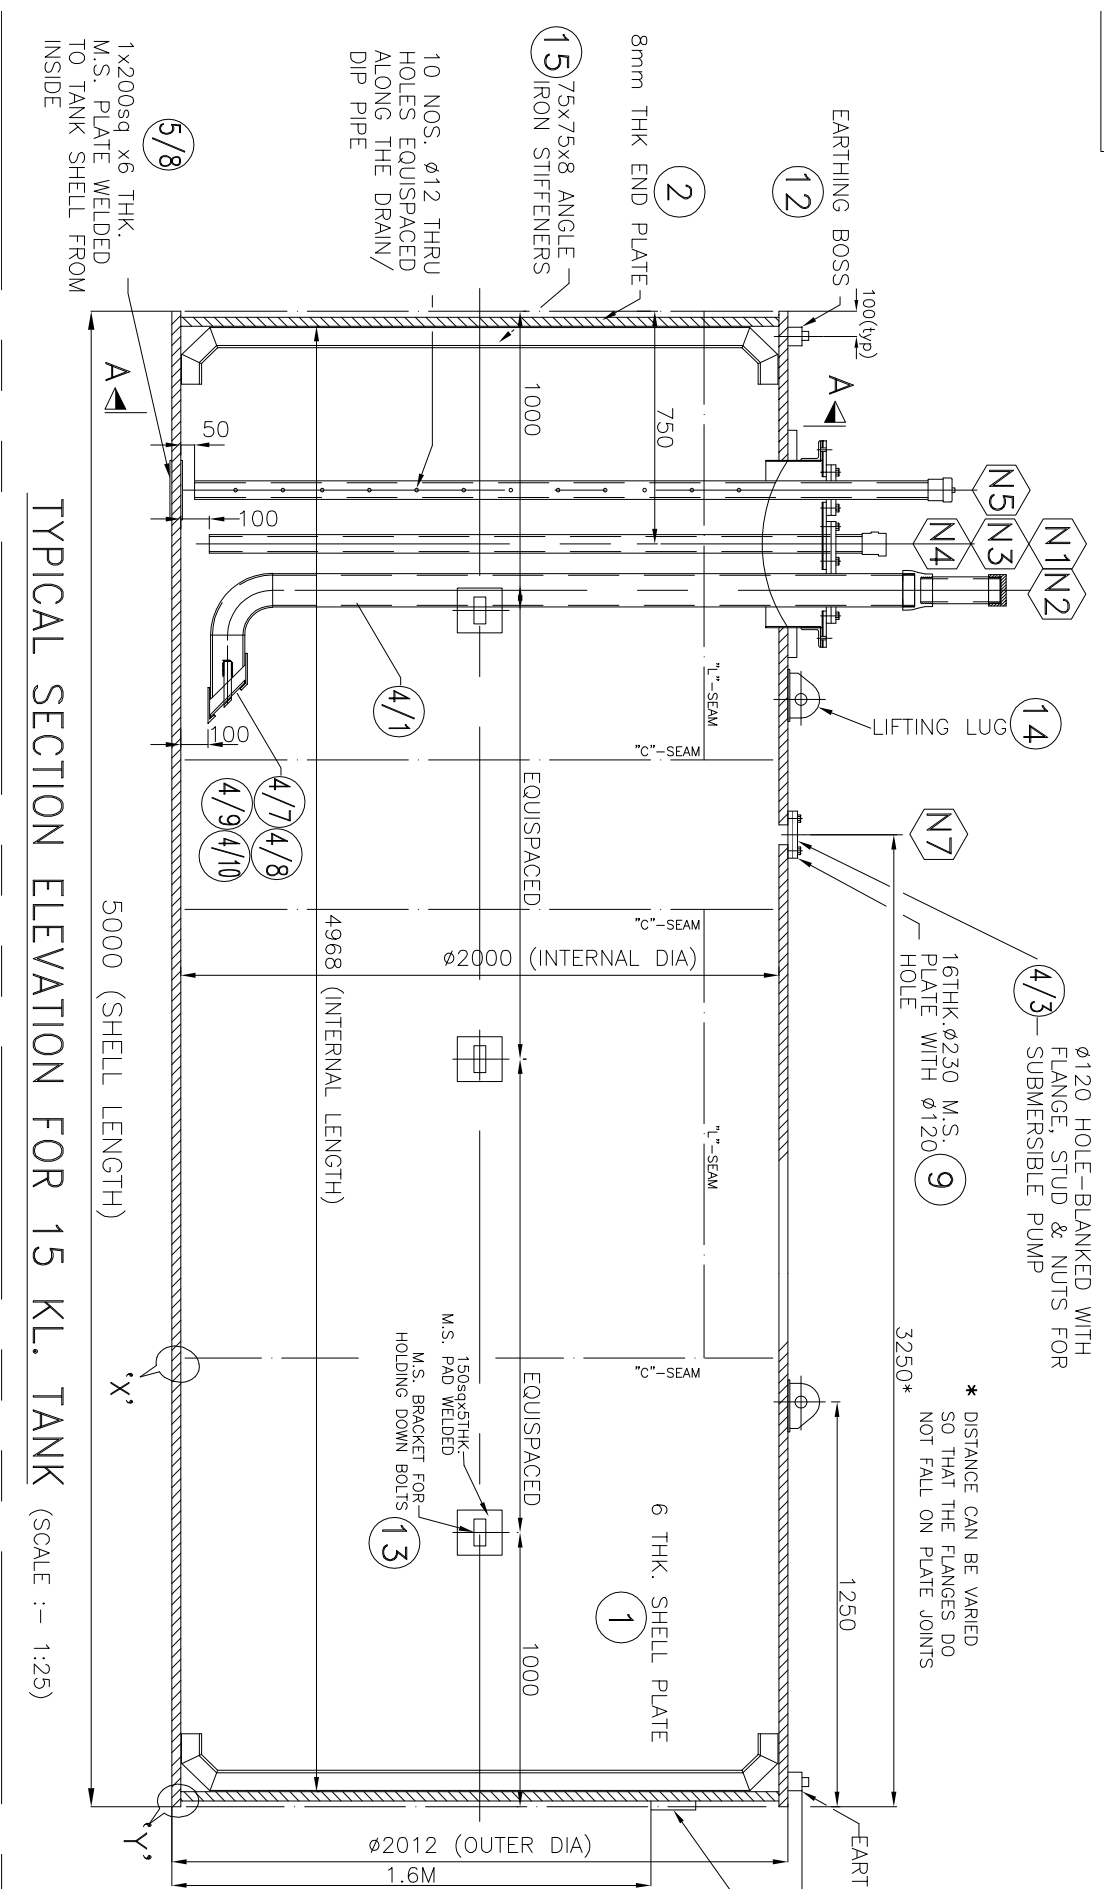



--

[illegible]

--

DIN A